

SPECIFICATION SHEET

CATEGORY ELECTRICAL BALLAST

T8 FLUORESCENT BALLAST

Performance

- Meets ANSI Standard C82.11-2002
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Non-Consumer limits
- Meets DOE energy conservation standards

Application

- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 131°F, 55°C
- Sound Rated: A
- Maximum case temperature Tc: 194°F, 90°C


Features:

- High efficiency (>90%) with NEMA Premium designation
- Parallel lamp operation - one lamp failure does not affect others
- Universal voltage (120-277 - 50/60Hz) for simplified inventory
- Low THD and quiet "A" sound rating
- Instant Start


Performance

- No PCB's,
- UL&cUL listed (Class P, Type 1 Outdoor)
- OCV 600V

ITEM #	ORD ID	UPC	NO. OF LAMPS	INPUT VOLTAGE	DIMENSION (INCH)			
					H	W	M	L
OL-37494	OL4P32T8	743269374948	4	120-277	1.1	1.3	8.9	9.5

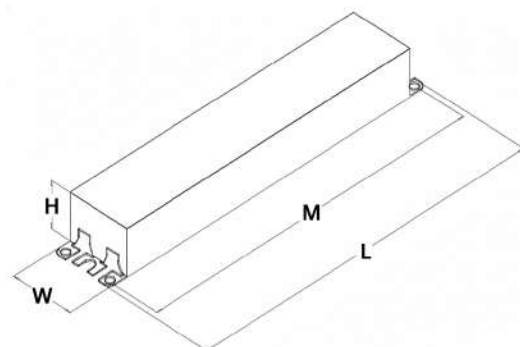

Wiring Diagram

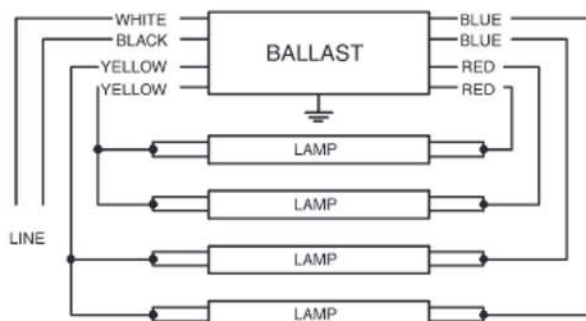

SPECIFICATION SHEET

CATEGORY ELECTRICAL BALLAST

LAMP TYPE			MIN START Temp.(F/C)	Vin (V)	IIN (A)	PIN (W)	ATHD ≤%	PF ≥	CF ≤	BF	BEF
TYPE	NO.	WATTS									
* F32T8	4	32	0/-18	120	0.93	112	10	0.98	1.7	0.88	0.80
FB32T8	4	32	0/-18	120	0.93	112	10	0.98	1.7	0.88	0.80
FB31T8	4	31	0/-18	120	0.90	107	10	0.98	1.7	0.88	0.83
FB28T8	4	28	0/-18	120	0.79	94	10	0.98	1.7	0.88	0.93
F32T8/ES/30	4	30	0/-18	120	0.85	101	10	0.98	1.7	0.88	0.87
F32T8/ES/28	4	28	0/-18	120	0.79	94	10	0.98	1.7	0.88	0.93
F32T8/ES/25	4	25	0/-18	120	0.74	88	10	0.98	1.7	0.88	1.00
F25T8	4	25	0/-18	120	0.72	87	10	0.98	1.7	0.89	1.02
F17T8	4	17	0/-18	120	0.49	59	10	0.98	1.7	0.93	1.57
F40T8	3	40	32/0	120	0.95	114	10	0.98	1.7	0.96	0.84
F32T8	3	32	0/-18	120	0.77	92	10	0.98	1.7	0.96	1.04
FB32T8	3	32	0/-18	120	0.77	92	10	0.98	1.7	0.96	1.04
FB31T8	3	31	0/-18	120	0.73	87	10	0.98	1.7	0.96	1.10
FB28T8	3	28	0/-18	120	0.65	77	10	0.98	1.7	0.96	1.24
F32T8/ES/30	3	30	0/-18	120	0.71	84	10	0.98	1.7	0.96	1.14
F32T8/ES/28	3	28	0/-18	120	0.65	77	10	0.98	1.7	0.96	1.24
F32T8/ES/25	3	25	0/-18	120	0.62	74	10	0.98	1.7	0.96	1.29
F25T8	3	25	0/-18	120	0.60	72	10	0.98	1.7	0.94	1.30
F17T8	3	17	0/-18	120	0.42	50	10	0.98	1.7	0.97	1.94
* F32T8	4	32	0/-18	277	0.40	108	10	0.98	1.7	0.88	0.81
FB32T8	4	32	0/-18	277	0.40	108	10	0.98	1.7	0.88	0.81
FB31T8	4	31	0/-18	277	0.39	106	10	0.98	1.7	0.88	0.85
FB28T8	4	28	0/-18	277	0.34	92	10	0.98	1.7	0.88	0.95
F32T8/ES/30	4	30	0/-18	277	0.37	100	10	0.98	1.7	0.88	0.88
F32T8/ES/28	4	28	0/-18	277	0.345	94	10	0.98	1.7	0.88	0.93
F32T8/ES/25	4	25	0/-18	277	0.325	88	10	0.98	1.7	0.88	1.00
F25T8	4	25	0/-18	277	0.32	85	10	0.98	1.7	0.89	1.05
F17T8	4	17	0/-18	277	0.22	58	10	0.98	1.7	0.93	1.59
F40T8	3	40	32/0	277	0.41	109	10	0.98	1.7	0.96	0.88
F32T8	3	32	0/-18	277	0.34	89	10	0.98	1.7	0.96	1.07
FB32T8	3	32	0/-18	277	0.34	89	10	0.98	1.7	0.96	1.07
FB31T8	3	31	0/-18	277	0.32	87	10	0.98	1.7	0.96	1.10
FB28T8	3	28	0/-18	277	0.285	77	10	0.98	1.7	0.96	1.25
F32T8/ES/30	3	30	0/-18	277	0.31	84	10	0.98	1.7	0.96	1.15
F32T8/ES/28	3	28	0/-18	277	0.29	77	10	0.98	1.7	0.96	1.25
F32T8/ES/25	3	25	0/-18	277	0.27	73	10	0.98	1.7	0.96	1.31
F25T8	3	25	0/-18	277	0.26	71	10	0.98	1.7	0.94	1.32
F17T8	3	17	0/-18	277	0.18	49	10	0.97	1.7	0.97	1.98



OHLETRIC®

130 NY-59
BUILDING D, UNIT 101
AIRMONT NY 10901

845-513-0344
SALES@OHLETRIC.COM
WWW.OHLETRIC.COM